


KUVE20-WL

球单轨引导系统

滑块 KWVE..-WL, 用于直线循环滚珠轴承和导轨组件的宽长型滑块

技术信息




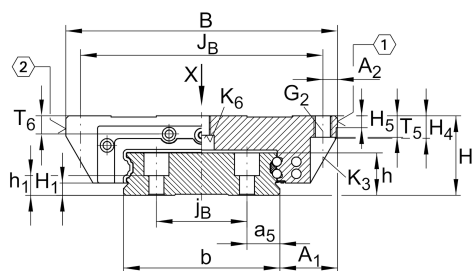


Main dimensions

l_{max}	[2,880] mm	Max length single piece guideway
H	[27] mm	height system
B	[80] mm	width carriage
L	[87.3] mm	overall length carriage

安装尺寸

C	[16,200] N	dynamic load rating
C_0	[36,500] N	static load rating
M_{0x}	[920] Nm	static moment rating about X axis
M_{0y}	[400] Nm	static moment rating about Y axis
M_{0z}	[400] Nm	static moment rating about Z axis

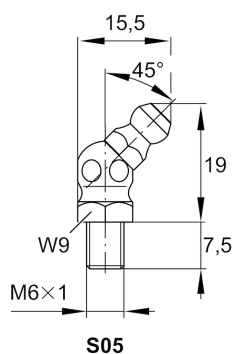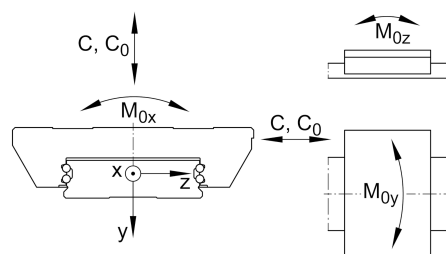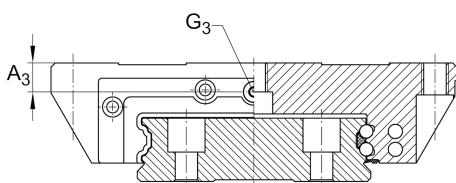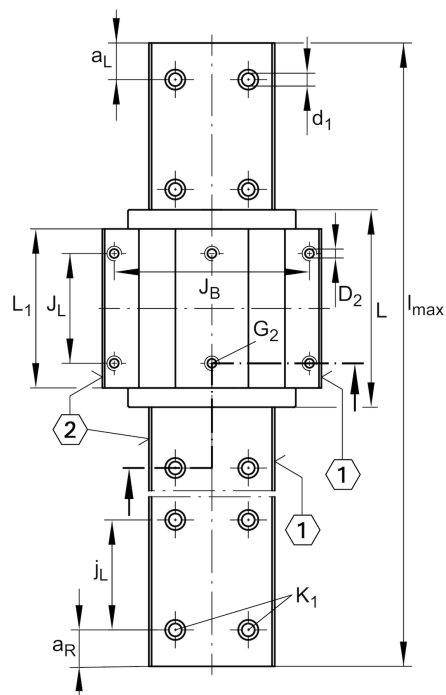

安装尺寸

A_1	[19] mm	
J_B	[70] mm	
j_B	[24] mm	
b	[42] mm	width rail
a_5	[9] mm	
A_2	[5] mm	
L_1	[67.9] mm	
J_L	[40] mm	
j_L	[60] mm	
$a_{L\ min}$	[20] mm	
$a_{L\ max}$	[53] mm	
$a_{R\ min}$	[20] mm	
$a_{R\ max}$	[53] mm	
H_1	[4.6] mm	
H_4	[10.6] mm	
H_5	[5] mm	
T_5	[10] mm	
T_6	[6] mm	
h	[17] mm	
h_1	[10] mm	
G_2	[M6]	fixing screws
$G_{2\ MA}$	[10] Nm	maximum tightening torque
K_1	[M4]	fixing screws
$K_{1\ MA}$	[5] Nm	maximum tightening torque
K_3	[M5]	fixing screws
$K_{3\ MA}$	[10] Nm	maximum tightening torque
K_6	[M6]	fixing screws
$K_{6\ MA}$	[17] Nm	maximum tightening torque
d_1	[4.6] mm	
D_2	[5.5] mm	
A_3	[5] mm	
G_3	[M5] mm	
t_{G_3}	[5] mm	

Related products

[KWVE20-WL]	Carriage
[TKVD20-W]	suitable Guide Rail