


KUVE30-B-L

球单轨引导系统

滑块 KWVE...-B-L, 长型滑块, 四列, 满装滚珠

技术信息

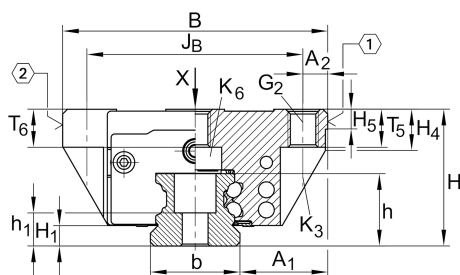






Main dimensions

l_{max}	[5,860] mm	Max length single piece guideway
H	[42] mm	height system
B	[90] mm	width carriage
L	[127] mm	overall length carriage

安装尺寸

C	[34,500] N	dynamic load rating
C_0	[74,000] N	static load rating
M_{0x}	[1,310] Nm	static moment rating about X axis
M_{0y}	[1,240] Nm	static moment rating about Y axis
M_{0z}	[1,240] Nm	static moment rating about Z axis

安装尺寸

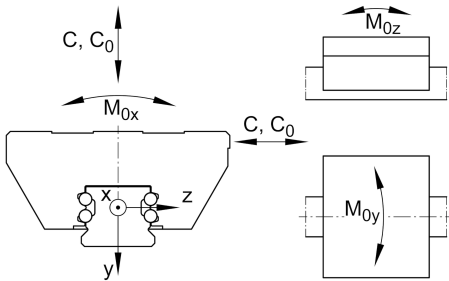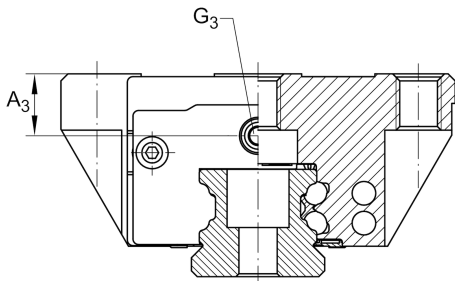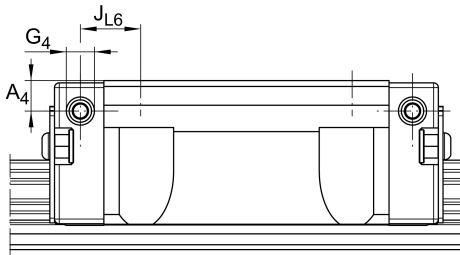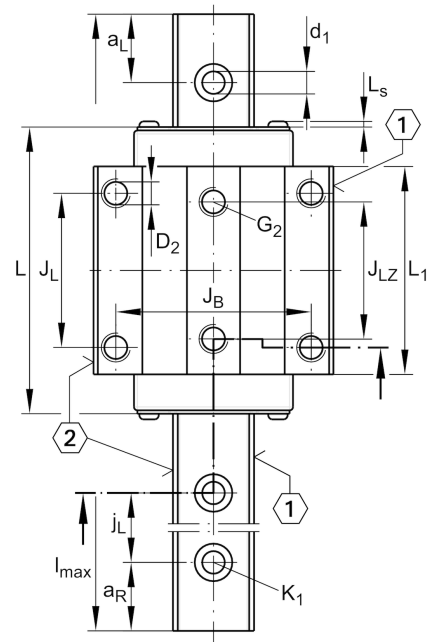

M6x1

S05

A_1	[31] mm	
J_B	[72] mm	
b	[28] mm	width rail
Tol_b	[-0.005] mm	Upper tolerance
Tol_b	[-0.03] mm	Lower tolerance
A_2	[9] mm	
L_1	[100] mm	
L_s	[1.65] mm	
J_L	[52] mm	
J_{LZ}	[44] mm	
j_L	[80] mm	
a_{Lmin}	[20] mm	
a_{Lmax}	[71] mm	
a_{Rmin}	[20] mm	
a_{Rmax}	[71] mm	
H_1	[5.9] mm	
H_4	[13.8] mm	
H_5	[6.25] mm	
T_5	[12] mm	
T_6	[11.5] mm	
h	[23.5] mm	
h_1	[11] mm	
G_2	[M10]	fixing screws
G_{2MA}	[41] Nm	maximum tightening torque
K_1	[M8]	fixing screws
K_{1MA}	[41] Nm	maximum tightening torque
K_3	[M8]	fixing screws
K_{3MA}	[41] Nm	maximum tightening torque
K_6	[M8]	fixing screws
K_{6MA}	[41] Nm	maximum tightening torque
d_1	[9] mm	
D_2	[8.6] mm	
A_3	[11.5] mm	
G_3	[M6] mm	
t_{G_3}	[7] mm	
A_4	[7] mm	
G_4	[M6]	
t_{G_4}	[7] mm	
J_{L6}	[29.5] mm	

数据表仅为所选产品的尺寸和基本额定载荷概览。请始终遵守本产品的所有更多信息和指南。您可通过我们网站上的联系表了解更多信息。

Related products

[KWVE30-B-L]	Carriage
[TKVD30]	suitable Guide Rail